
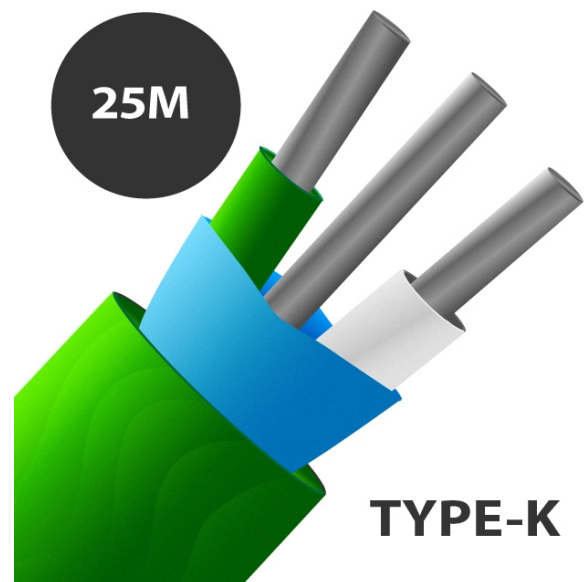
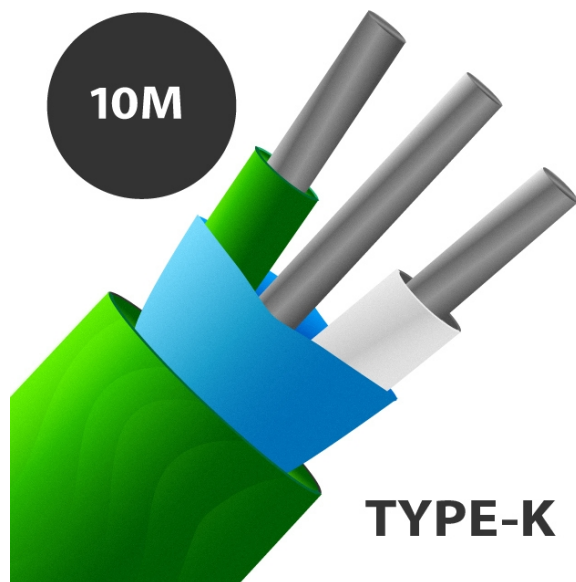


## Tipo K Cavo / Filo per termocoppia schermata in Mylar isolato in PVC (IEC)

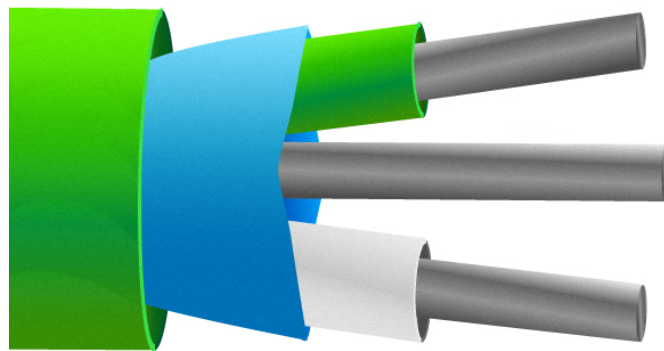

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Specifiche**
**Specifications**

|  |   |
|--|---|
| <b>General Description</b>                             | Good general purpose insulation for 'light' environments. Waterproof and very flexible. |
| <b>Cable Length</b>                                    | 10m, 25m, 50m, 100m, 200m   |
| <b>Cable Type</b>                                      | Twisted cores & screened construction for reduced electrical noise                      |
| <b>Core / Strands</b>                                  | 7/0.2mm   |
| <b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>  | 0.219   |
| <b>Outer Colour</b>                                    | Green   |
| <b>+ Colour</b>  | Green   |
| <b>- Colour</b>  | White   |
| <b>Drain Wire</b>                                      | Yes   |
| <b>Insulation Material</b>                             | PVC Insulated with a mylar screen   |
| <b>Loop Resistance 7/0.2 (Ohms per combined metre)</b> | 4.5   |
| <b>Max. Temperature</b>                                | +105°C  |
| <b>Min. Temperature</b>                                | -10°C   |
| <b>+ Conductor</b>                                     | Nickel Chromium   |
| <b>- Conductor</b>                                     | Nickel Aluminium  |



|                          |   |
|--------------------------|---|
| <b>Screen</b>            | Yes                                       |
| <b>Screen Type</b>       | Mylar                                     |
| <b>Standards Met</b>     | Colour code (cores & jacket) to IEC-584-3 |
| <b>Thermocouple Type</b> | K   |
| <b>Tolerance</b>         | Class 2                                   |