
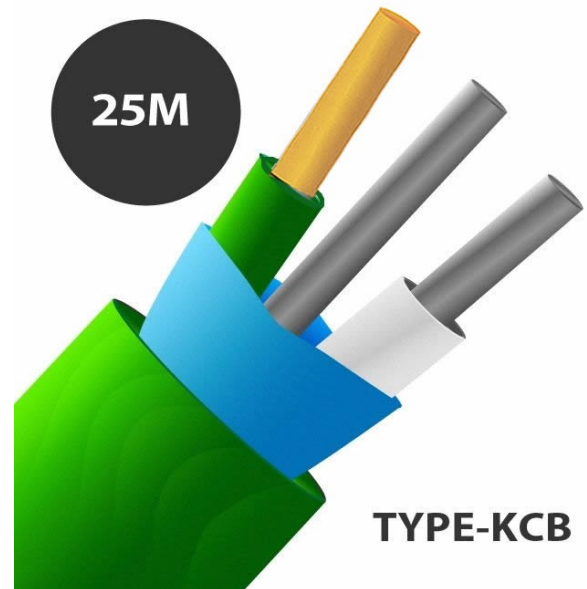
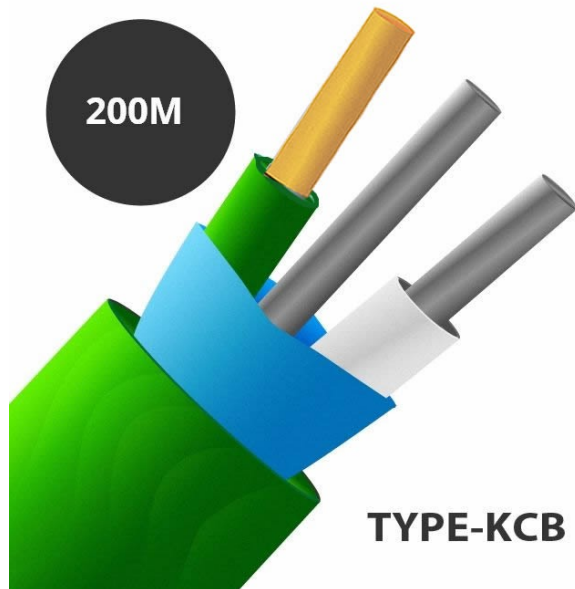


Tipo VX (KCB) Cavo/Filo Termocoppia Schermata in Mylar Isolato in PVC (IEC)

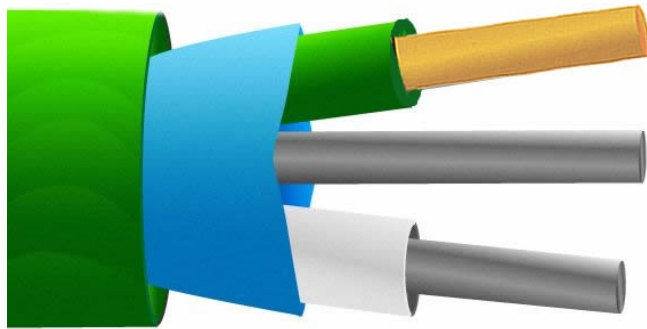

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo VX (KCB) Cavo/Filo Termocoppia Schermata in Mylar Isolato in PVC (IEC)

Il cavo compensatore somiglia alla caratteristica termoelettrica della termocoppia rilevante su un intervallo limitato di temperatura ambiente, tipicamente da 0 a 80C. Poich questi cavi sono realizzati con materiali a basso costo, possibile ottenere risparmi sugli impianti rispetto all'installazione di veri cavi di prolunga termocoppia. La tolleranza per ogni singolo filo +/- 0,02mm.

Specifiche
Specifications

| | |
|--|---|
| General Description | Good general purpose insulation for 'light' environments. Waterproof and very flexible. |
| Cable Length | 10m, 25m, 50m, 100m, 200m |
| Cable Type | Twisted cores & screened construction for reduced electrical noise |
| Core / Strands | 7/0.2mm |
| Conductor Cross Section 7/0.2 (mm²) | 0.219 |
| Outer Colour | Green |
| + Colour | Green |
| - Colour | White |
| Insulation Material | PVC Insulated with a mylar screen |
| Loop Resistance 7/0.2 (Ohms per combined metre) | 2.3 |
| Max. Temperature | +105°C |
| Min. Temperature | -10°C |
| + Conductor | Copper |

| | |
|--------------------------|--|
| - Conductor | Constantan |
| Screen | Yes |
| Screen Type | Mylar |
| Standards Met | Colour code (cores & jacket) to IEC-584-3 |
| Thermocouple Type | VX (KCB) |
| Tolerance | Class 2. The tolerance on each individual strand of wire is +/- 0.02mm |