Cavo / Filo per termocoppia a doppia coppia intrecciata isolato tipo K PFA - filo di 1/0,2 mm

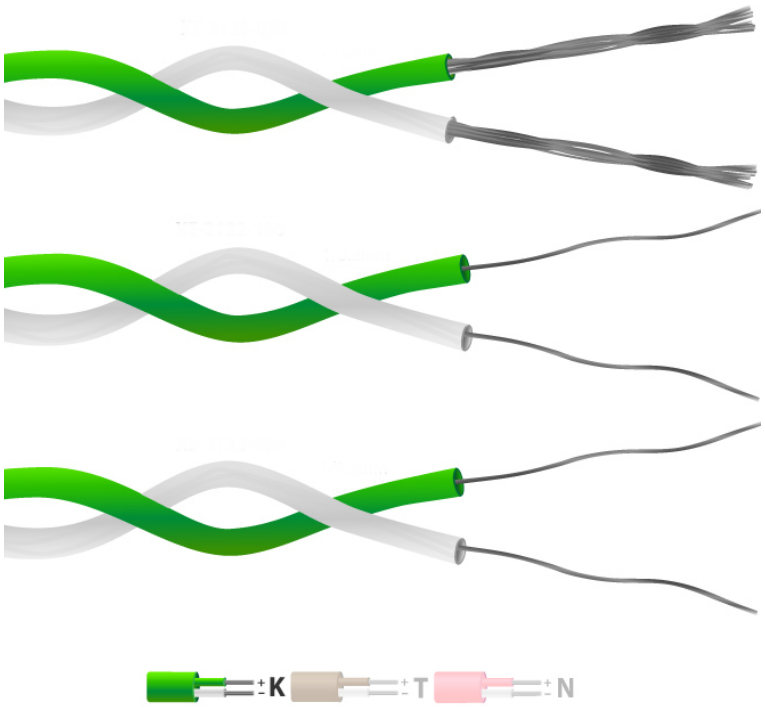

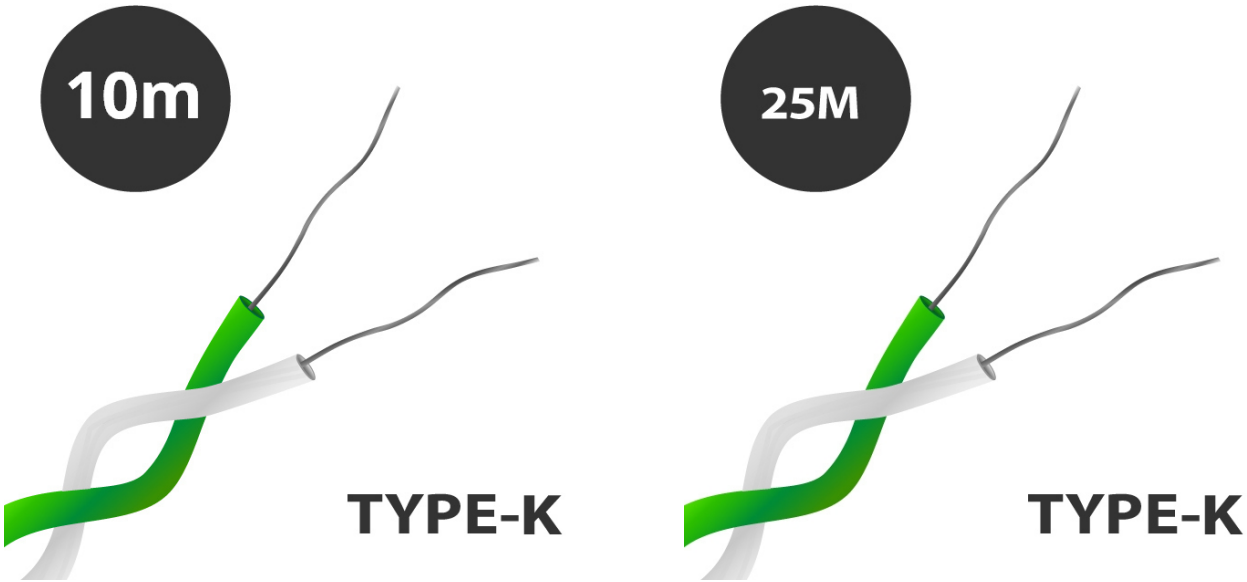

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Tipo K Cavo / Filo Termocoppia Twin Twin Twisted Coppie Isolato Tipo K (IEC)

Doppia coppia torciata in Teflon PFA per estensione o realizzazione di termocoppie semplici. Il TeflonPFA ha una buona resistenza e flessibilit meccanica, resistente a oli, acidi e altri fluidi, gas, vapore e pressione nocivi.

Acquista direttamente da Labfacility in lunghezze di bobina fino a 200 m
Per lunghezze pi lunghe, puoi ordinare rulli da 300m e 500m da Farnell, clicca sul logo Farnell nella pagina del prodotto per vedere le opzioni di acquisto.

Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	5m, 10m, 25m, 50m, 100m, 200mm
Cable Type	Single pair of PFA insulated conductors twisted together
Core / Strands	1/0.2mm
Conductor Cross Section 1/0.2 (mm2)	0.032
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Teflon®
Loop Resistance 1/0.2 (Ohms per combined metre)	31.8
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium

- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1