



Tipo K PFA Isolato Doppio Coppia Termocoppia / Filo (IEC) - filo di 1/0,2 mm

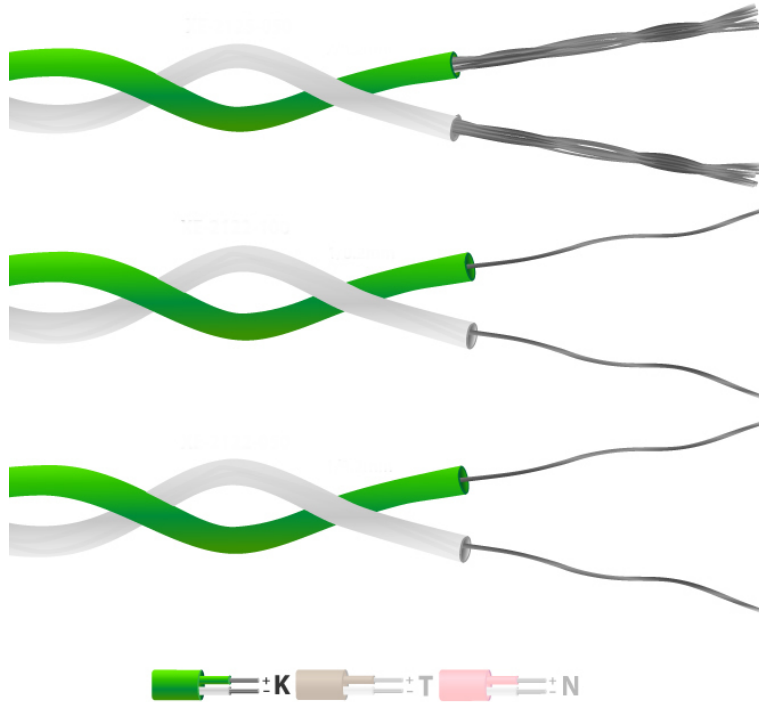


10m

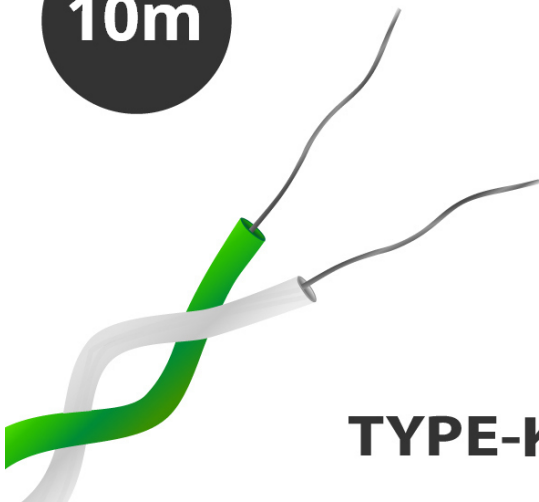

TYPE-K

25M

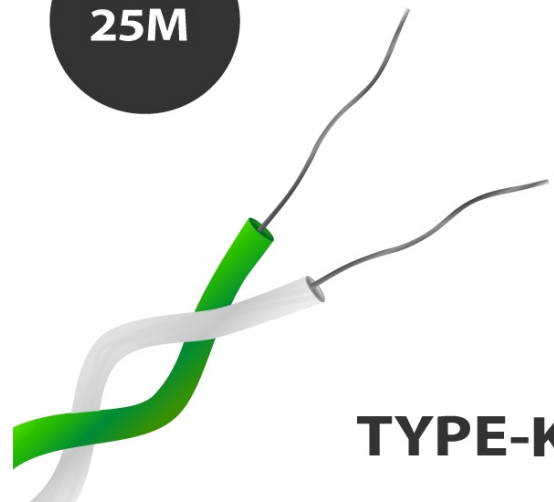

TYPE-K

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo K PFA Cavo / Filo Termocoppia Twin Twined Twined Twin Twin Insulated (IEC)

Doppia coppia intrecciata in Teflon PFA per estendere o realizzare semplici termocoppie. Il PFA Teflonha una buona resistenza e flessibilit meccanica, resistente a oli, acidi e altri fluidi nocivi, gas, vapore e pressione.

Specifiche
Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	5m, 10m, 25m, 50m, 100m, 200mm
Cable Type	Single pair of PFA insulated conductors twisted together
Core / Strands	1/0.2mm
Conductor Cross Section 1/0.2 (mm²)	0.032
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Teflon®
Loop Resistance 1/0.2 (Ohms per combined metre)	31.8
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium



Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1