

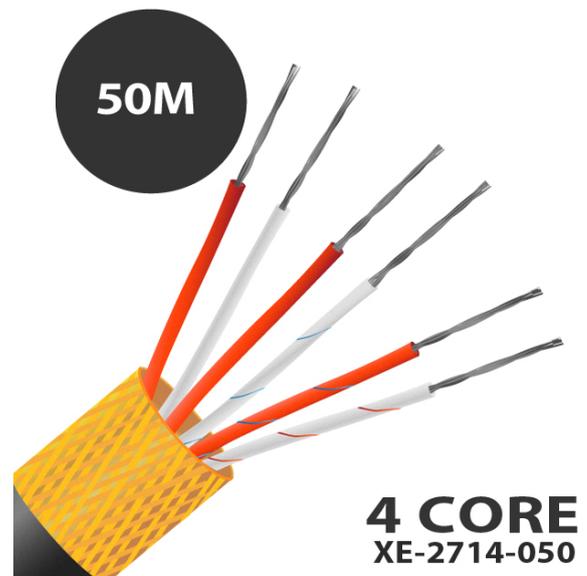


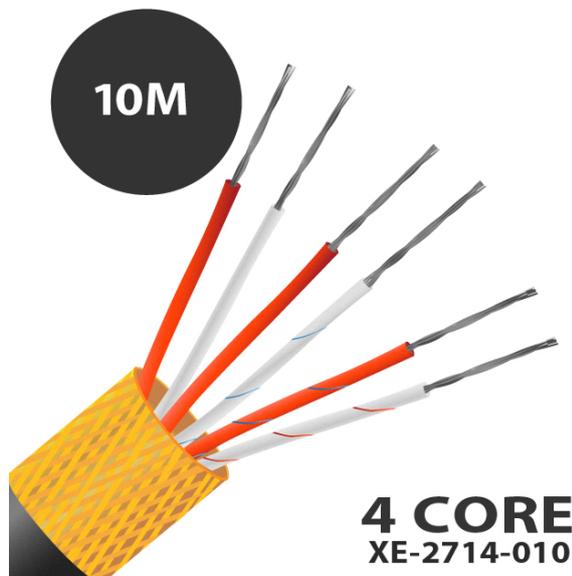

LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Schermo in rame placcato in stagno isolato in PVC a 4 nuclei, cavo / filo del sensore PRT

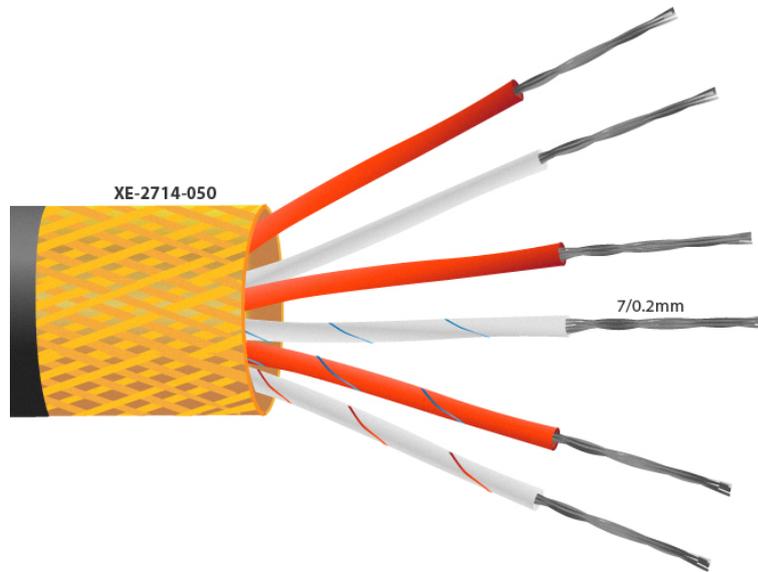

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Schermo in rame placcato in stagno isolato in PVC a 4 nuclei, cavo / filo del sensore PRT

Cavo isolato in PVC per l'estensione dei termometri a resistenza al platino. Comunemente utilizzato per termometri Pt100 ma adatto anche ad altri tipi come Pt130, Pt500 e Pt1000

Specifiche**Specifications**

| | |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General Description | 4 core PVC insulated 7/0.2mm tin plated copper conductors, twisted cores, polyester tape & nylon cord, tin plated copper braided screen with PVC insulated outer jacket |
| Cable Length | 10, 25, 50, 100m |
| Cable Type | Mylar shield with tin plated copper braiding |
| Core / Strands | 7/0.2mm |
| Insulation Material | PVC insulation |
| Max. Temperature | +105°C |
| Min. Temperature | -10°C |
| Number of Wires | 4 |
| Standards Met | Cores colour coded 2 x Red / 2 x White to IEC-751 with black outer jacket |