


Controllo di calibrazione della termocoppia di precisione con catena a mano a catena fredda

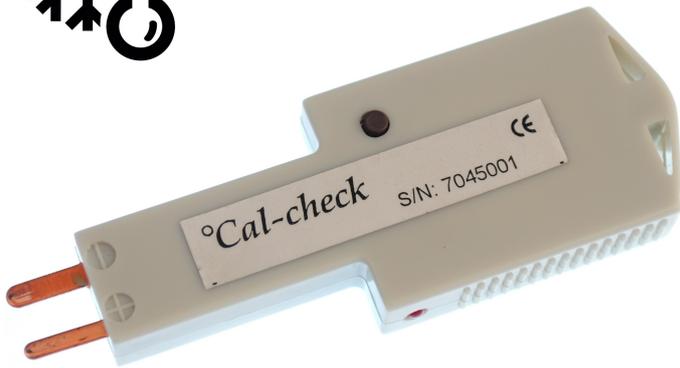

[Click here to view product](#)

Product Code	XE-4100
General Description	The °Cal-check is a unique, novel concept for rapid, simple and convenient in-house calibration checking of thermocouple instrumentation, eliminating the need to send it away for laboratory calibration.
Type	Type K or T available
Accuracy	+/-0.25°C at 23°C ambient temperature
Resolution	0.1°C
Host Instrument Input Impedance	10k Ohm minimum
Temperature Coefficient	18-28°C ambient temperature, better than +/-0.5°C. 0-50°C ambient temperature, +/-0.5 °C

Storage Temperature Range	-20 to 70°C
Ambient Operating Temperature	0 to 50°C, 18 to 28°C recommended
Power Consumption	Battery life: typically 2400 operations; 5 years? shelf life
Power Supply	CR2032; 3V 230mAh
Standards Met	K or T to IEC584. Moulded case rated IP50
Accessories	Supplied with a traceable certificate of calibration