


## Controllo generale della termocoppia industriale industriale

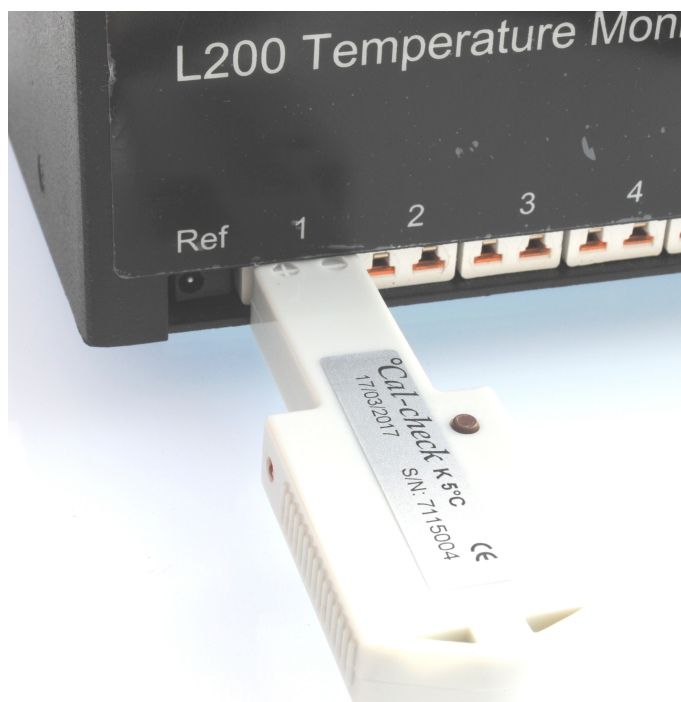

[Click here to view product](#)

<b>Product Code</b>	XE-4126
<b>General Description</b>	The °Cal-check is a unique, novel concept for rapid, simple and convenient in-house calibration checking of thermocouple instrumentation, eliminating the need to send it away for laboratory calibration.
<b>Type</b>	Thermocouple Type K
<b>Accuracy</b>	+/-0.25°C at 23°C ambient temperature
<b>Resolution</b>	0.1°C
<b>Host Instrument Input Impedance</b>	10k Ohm minimum
<b>Temperature Coefficient</b>	18-28°C ambient temperature, better than +/-0.5°C 0-50°C ambient temperature, +/-0.5 °C

<b>Storage Temperature Range</b>	-20 to 70°C
<b>Ambient Operating Temperature</b>	0 to 50°C, 18 to 28°C recommended
<b>Power Consumption</b>	Battery life: typically 2400 operations; 5 years? shelf life
<b>Power Supply</b>	CR2032; 3V 230mAh
<b>Standards Met</b>	Thermocouple Type K to IEC584. Moulded Case to IP50
<b>Accessories</b>	Supplied with a traceable certificate of calibration