



Tipo N Cavi / Filo a coppia piatta isolante in fibra di vetro con treccia in acciaio inox (IEC)

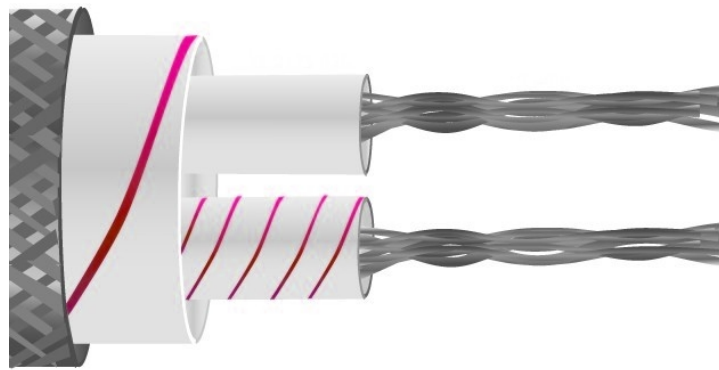


25M

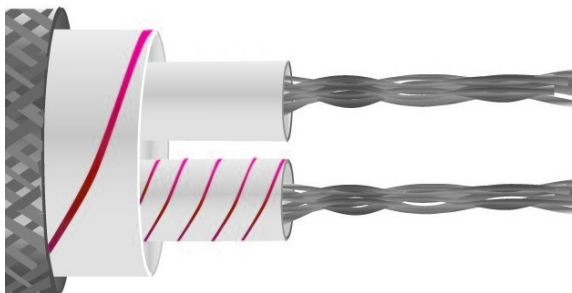

TYPE-N

10m

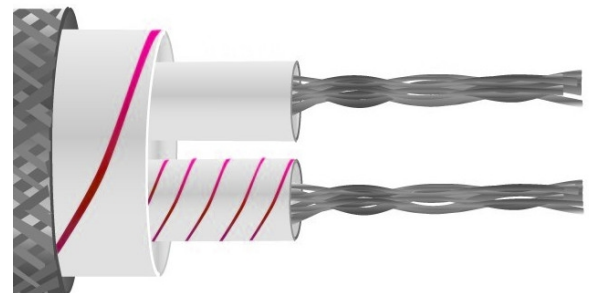

TYPE-N

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo N Cavi / Filo a coppia piatta isolante in fibra di vetro con treccia in acciaio inox (IEC)

Costruzione a coppie piatte isolate in fibra di vetro, conduttori posati piatti, fibra di vetro isolata con giacca in fibra di vetro, silicone verniciato ovunque + treccia in acciaio inox per maggiore protezione e resistenza meccanica. Buona resistenza alla temperatura ma non adatta dove sono presenti fluidi.

Specifiche
Specifications

General Description	Good strength to physical disturbance and high temperature (up to 400°C). Will not prevent ingress of fluids.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Flat pair cable
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
+ Colour	Pink
- Colour	White
Drain Wire	No
Insulation Material	Glassfibre insulated extension cable with stainless steel overbraiding
Loop Resistance 7/0.2 (Ohms per combined metre)	6.2
Max. Temperature	+350°C (short periods up to 400°C)
Min. Temperature	-60°C
+ Conductor	Nicrosil
- Conductor	Nisil



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	N
Tolerance	Class 2