



## Tipo U Cavi / Filo a coppia piatta isolato in fibra di vetro con treccia in acciaio inox (IEC)

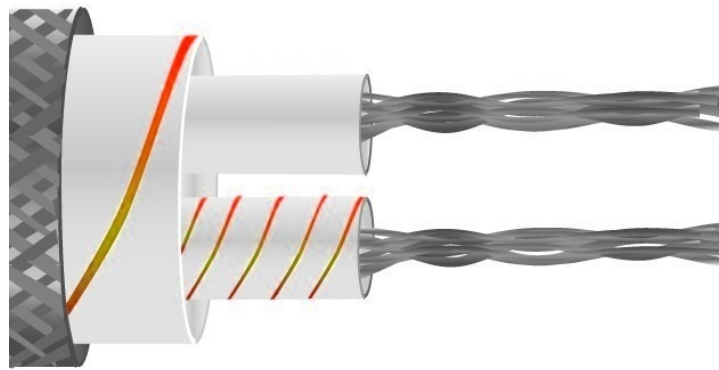


10m

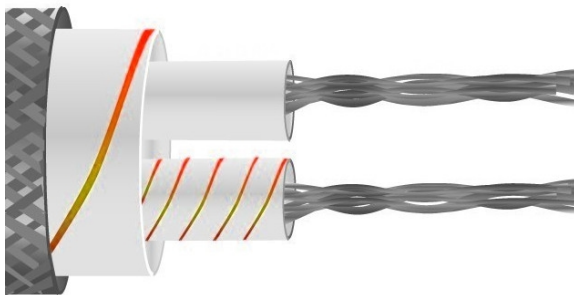

**TYPE- U**

50M

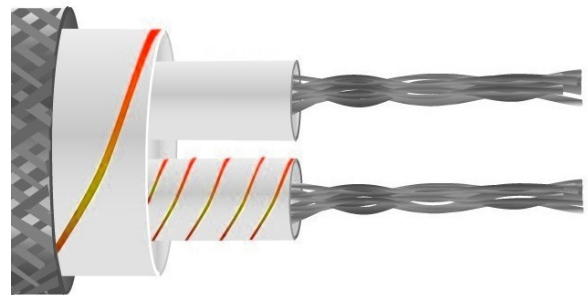

**TYPE- U**

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Tipo U Cavi / Filo a coppia piatta isolato in fibra di vetro con treccia in acciaio inox (IEC)**

Costruzione a coppie piatte isolate in fibra di vetro, conduttori posati piatti, fibra di vetro isolata con giacca in fibra di vetro, silicone verniciato ovunque + treccia in acciaio inox per maggiore protezione e resistenza meccanica. Buona resistenza alla temperatura ma non adatta dove sono presenti fluidi.

**Specifiche**
**Specifications**

<b>General Description</b>	Good strength to physical disturbance and high temperature (up to 400°C). Will not prevent ingress of fluids.
<b>Cable Length</b>	10m, 25m, 50m, 100m, 200m
<b>Cable Type</b>	Flat pair cable
<b>Core / Strands</b>	7/0.2mm
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>+ Colour</b>	Orange
<b>- Colour</b>	White
<b>Drain Wire</b>	No
<b>Insulation Material</b>	Glassfibre insulated extension cable with stainless steel overbraiding
<b>Loop Resistance 7/0.2 (Ohms per combined metre)</b>	0.2
<b>Max. Temperature</b>	+350°C (short periods up to 400°C)
<b>Min. Temperature</b>	-60°C
<b>+ Conductor</b>	Copper
<b>- Conductor</b>	Copper Nickel



# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to IEC-584-3
<b>Thermocouple Type</b>	U
<b>Tolerance</b>	Class 2