




LABFACILITY


TEMPERATURE & PROCESS TECHNOLOGY

Tipo N Cavo / Filo per Termocoppia a Coppia Piatta Isolata in Fibra di Vetro (IEC) - Trebello 1/0,315mm

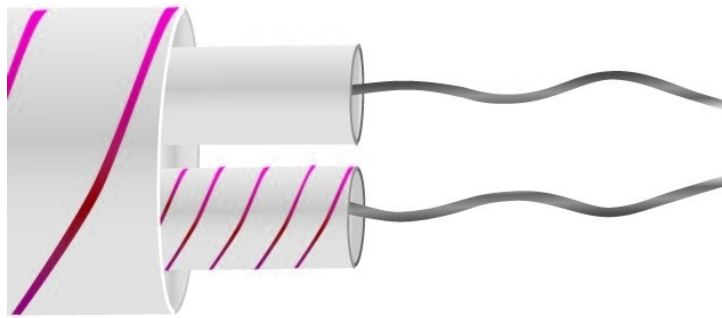


10m

25M

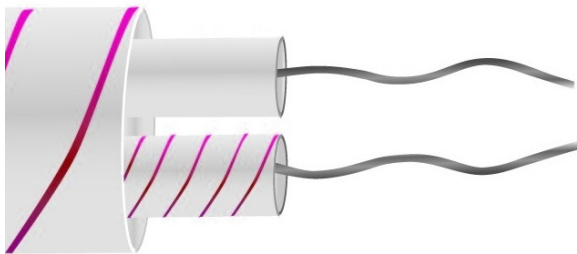

TYPE-N

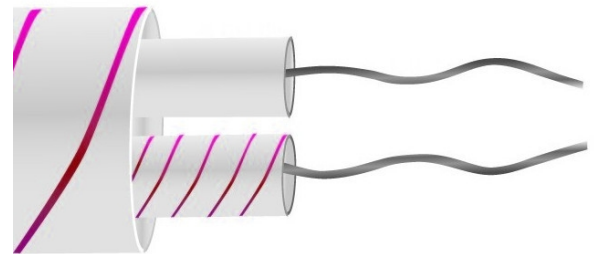

TYPE-N

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cavo / Filo termocoppia a coppia piatta isolante in fibra di vetro tipo N (IEC)

Costruzione a coppia piatta isolata in fibra di vetro, conduttori posati in piano, fibra di vetro isolata con fibra di vetro in generale, silicone verniciato ovunque. Buona resistenza alla temperatura ma non adatta dove sono presenti fluidi.

Specifications

General Description	Good temperature range but will not prevent ingress of fluids. Fairly flexible but does not provide good mechanical protection.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Flat pair cable
Core / Strands	1/0.315mm
Conductor Cross Section 1/0.315 (mm²)	0.078
Outer Colour	Pink & White
+ Colour	Pink
- Colour	White
Drain Wire	No
Insulation Material	Glassfibre insulated
Loop Resistance 1/0.315 (Ohms per combined metre)	17.7
Max. Temperature	+350°C (short periods up to 400°C)
Min. Temperature	-60°C
+ Conductor	Copper
- Conductor	Nisil



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	N
Tolerance	Class 2