# Termocoppia minerale isolante con diametro 0,81mm con vaso e coda filettati ANSI - Giunzione isolata - lunghezza sonda 100mm

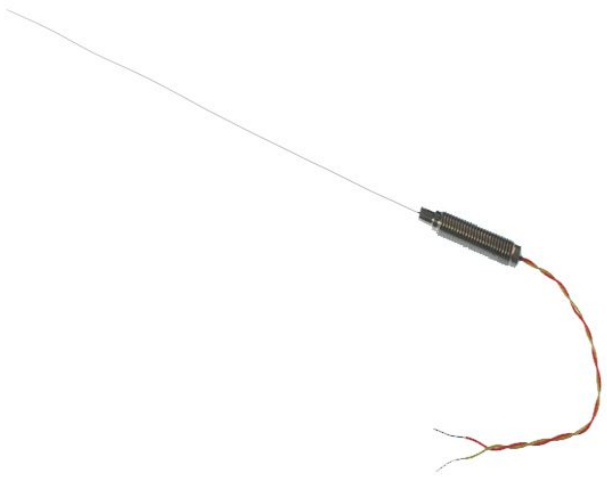

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables.  The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

# Datasheet

Tipo K con pentola e code filettate in acciaio inox 316

Se hai bisogno di quantit maggiori, ti preghiamo di inviare sales@labfacility.com email o di telefonare alla nostra linea vendita 01243 871280.

**Hai bisogno di calibrare il sensore di temperatura?**

Tracciabile secondo standard di calibrazione ISO17025 (UKAS), Labfacility offre la scelta tra una calibrazione tracciabile a 3 o 5 punti utilizzando la nostra struttura di calibrazione interna.

**Tieni presente che se aggiungi un'opzione di calibrazione al tuo ordine verrai contattato per informazioni sulla consegna.**

**Indicazioni**

## Specifications

| | |
|---|---|
| **Product Code** | XE-0263-001 |
| **General Description** | Type K with threaded pot & tails in 316 stainless steel |
| **Sensor Type** | Mineral Insulated |
| **Thermocouple Type** | K |
| **Element/hot junction** | Single element, junction insulated from sheath |
| **Probe Diameter** | 0.81mm |
| **Probe Length** | 100mm |
| **Sheath Material** | 316 stainless steel |
| **Pot Type** | M8 x 1.0mm fine pitch threaded pot seal (200°C) |
| **Cable Length** | 100mm |
| **Cable Type** | PFA insulated twin twisted ANSI (Temp -75 TO +250°) |
| **Core / Strands** | 7/0.2mm |
| **Termination Type** | Bare Tails |

| | |
|---|---|
| **Max. Temperature** | +650°C |
| **Min. Temperature** | -40°C |
| **Tolerance** | Class1 |
| **Standards Met** | In accordance with ANSI MC96.1 |