
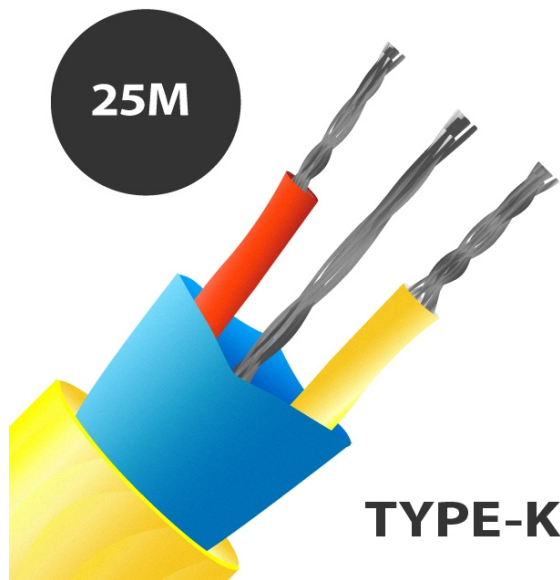


Tipo K PVC isolato Mylar schermato Cavo / cavo (ANSI)

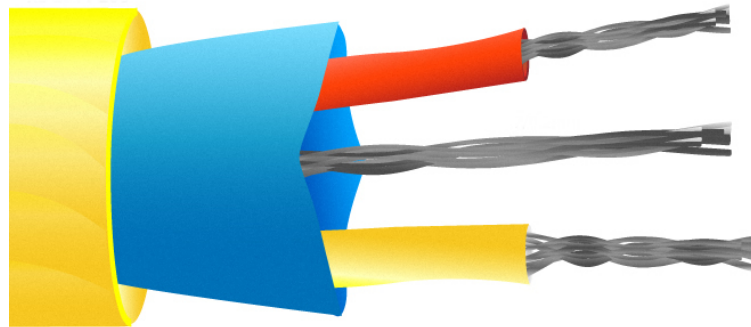

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo K PVC isolato Mylar schermato Cavo / cavo (ANSI)

Il cavo di compensazione assomiglia alla caratteristica termoelettrica della termocoppia pertinente su un intervallo di temperatura ambiente limitato, da 0 a 80 gradi centigradi in genere. Poiché questi cavi sono realizzati con materiali a basso costo, è possibile ottenere risparmi sui costi per gli impianti rispetto all'esecuzione di un vero cavo di estensione thermocouple.

Indicazioni**Specifications**

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10, 25, 50, 100 & 200m
Cable Type	Twisted cores & screened construction for reduced electrical noise
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Yellow
+ Colour	Yellow
- Colour	Red
Drain Wire	Yes
Insulation Material	PVC Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+105°C



Min. Temperature	-10°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	Mylar Screened
Standards Met	Colour code (cores & jacket) to ANSI MC96.1
Thermocouple Type	K
Tolerance	Class 2