


Schermo in rame placcato argentato isolato PTFE a 4 nuclei, cavo / filo del sensore PRT

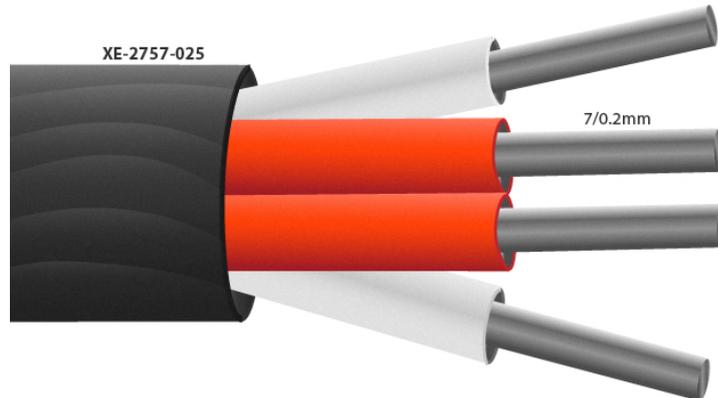

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Schermo in rame placcato argentato isolato PTFE a 4 nuclei, cavo / filo del sensore PRT

Pu essere utilizzato per estendere configurazioni RTD a 2, 3 o 4 fili. Comunemente usati per i termometri Pt100, adatti anche ad altri tipi come Pt130, Pt500 e Pt1000

Specifiche**Specifications**

| | |
|----------------------------|---|
| General Description | 4 core PTFE insulated 7/0.2mm silver plated copper conductors, twisted cores, kapton tape, silver plated copper braided screen with PTFE insulated outer jacket |
| Cable Length | 10m, 25m, 50m, 100m |
| Cable Type | wrapped PTFE tape construction |
| Core / Strands | 7/0.2mm |
| Insulation Material | Overall black PTFE insulation |
| Max. Temperature | +260°C |
| Min. Temperature | -75°C |
| Number of Wires | 4 |
| Standards Met | Cores colour coded 2 x Red / 2 x White to IEC-751 + black outer jacket |