
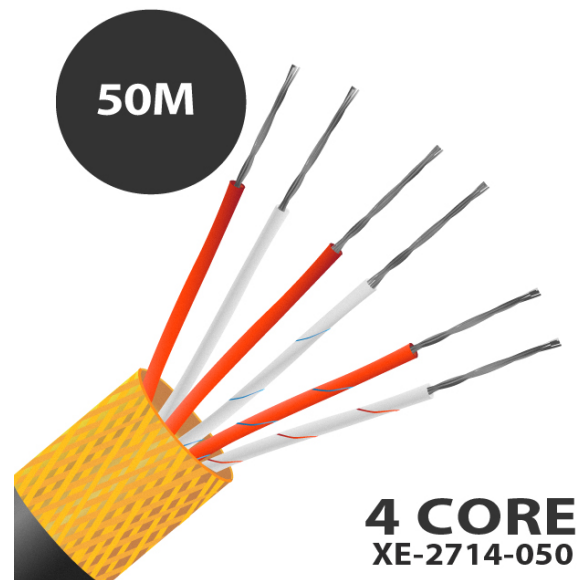
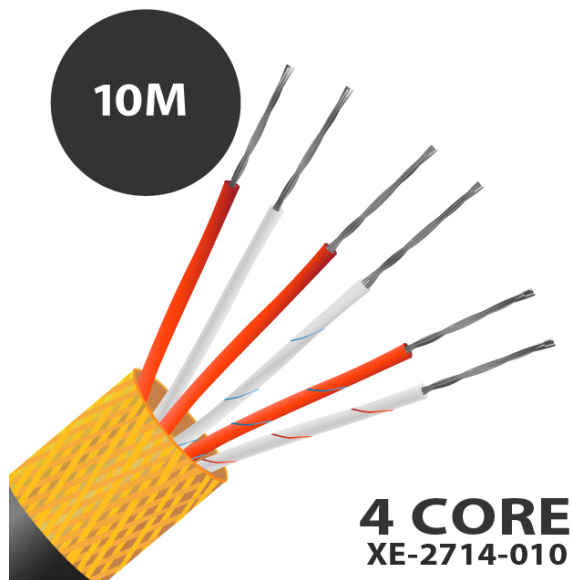


## 4 core ISOLATO in PVC, schermo in rame stagnato, cavo / filo del sensore PRT

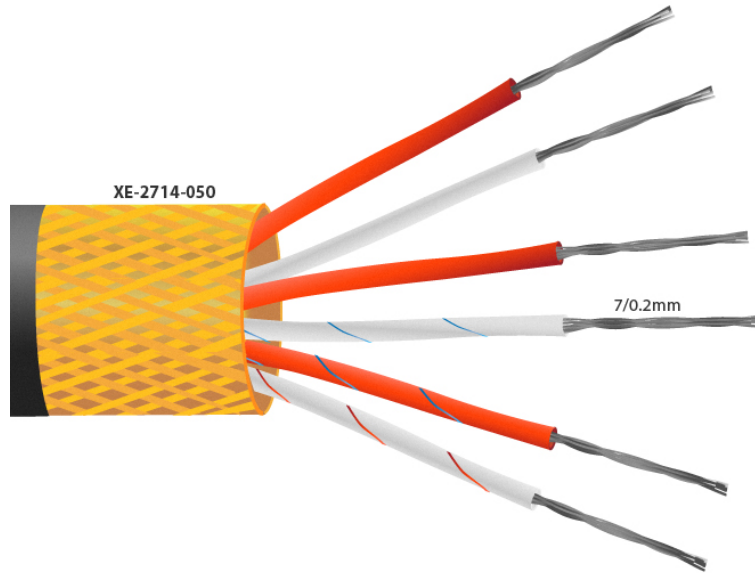

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**4 core ISOLATO in PVC, schermo in rame stagnato, cavo / filo del sensore PRT**

Cavo isolato in PVC per l'estensione dei termometri a resistenza al platino. Comunemente usato per termometri Pt100? ma adatto anche con altri tipi come Pt130, Pt500 e Pt1000?

**Indicazioni****Specifications**

<b>General Description</b>	4 core PVC insulated 7/0.2mm tin plated copper conductors, twisted cores, polyester tape & nylon cord, tin plated copper braided screen with PVC insulated outer jacket
<b>Cable Length</b>	10, 25, 50m
<b>Cable Type</b>	Mylar shield with tin plated copper braiding
<b>Core / Strands</b>	7/0.2mm
<b>Insulation Material</b>	PVC insulation
<b>Max. Temperature</b>	+105°C
<b>Min. Temperature</b>	-10°C
<b>Number of Wires</b>	4
<b>Standards Met</b>	Cores colour coded 2 x Red / 2 x White to IEC-751 with black outer jacket