




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Termocoppia a isolamento minerale a risposta rapida da 0,25 mm di diametro con pentola semplice e code IEC in PFA - Tipo K - Giunzione con messa a terra - 250 mm

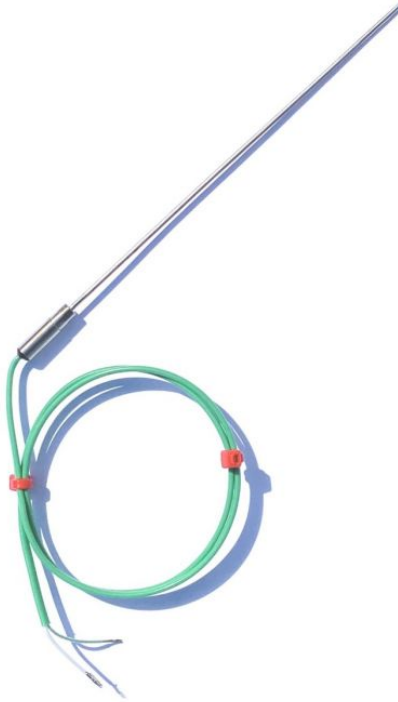

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Hai bisogno di calibrare il tuo sensore di temperatura?

Tracciabile secondo gli standard di calibrazione ISO17025 (UKAS), Labfacility offre la possibilità di scegliere tra una calibrazione tracciabile a 3 o 5 punti utilizzando la nostra struttura di calibrazione interna.

Tieni presente che se aggiungi un'opzione di calibrazione al tuo ordine, verrai contattato per informazioni sulla consegna.

Indicazioni**Specifications**

Product Code	XE-0802-001
General Description	Highly flexible, sheath can be bent/formed to suit many applications and processes
Sensor Type	Type K IEC MA STYLE probes 0.25mm
Thermocouple Junction	Single element, grounded junction
Probe Length	250mm
Sheath Material	Stainless steel 316 sheath
Pot Type	Plain pot seal (200°C)
Cable Length	500mm
Cable Type	PFA insulated lead, flat pair with tails
Core / Strands	7/0.2mm
Max. Temperature	260°C
Min. Temperature	-40°C
Important Information	A 1%+ Length Tolerance applies